



**Mesurflo® Y-Ball Automatic
Balancing Hose Kits 2516
Order Form**


- 1) A separate sheet is required for each configuration change
- 2) Make a check mark by each option and list quantities by each Flow Rate
- 3) Make as many copies as needed for each order

Hose Kit Type	
Y-Ball Mesurflo®	
Hose Kit Connection Size	
DN20 (3/4)	
DN25 (1)	
Hose Length (Other Lengths Available. Contact Factory)	
0.3M (12")	
0.45M (18")	
0.6M (24")	
0.9M (36")	
Strainer Options* (Supply Side)	
No Strainer	
Y-Ball Combination Strainer & Ball Valve with Pressure/Temperature Port, Blowdown Valve with Hose Connector	
Ball Valve* (Supply Side)	
Ball Valve with Pressure/Temperature Port (If no strainer ordered)	
Ball Valve (Return Side)	
Y-Ball Combination Mesurflo® & Ball Valve with Pressure/Temperature Ports	

LPM (GPM)	Qty	LPM (GPM)	Qty	LPM (GPM)	Qty
1.9 (0.50)		7.6 (2.00)		21.0 (5.50)	
2.3 (0.63)		8.5 (2.25)		23.0 (6.00)	
2.8 (0.75)		9.5 (2.50)		25.0 (6.50)	
3.8 (1.00)		11.4 (3.00)		27.0 (7.00)	
4.3 (1.13)		12.3 (3.25)		28.4 (7.50)	
4.7 (1.25)		13.3 (3.50)		30.3 (8.00)	
5.7 (1.50)		15.1 (4.00)		34.1 (9.00)	
6.2 (1.63)		17.0 (4.50)			
6.6 (1.75)		19.0 (5.00)			



Mesurflo® 2516
Automatic Balance Hose Kit
Flow Rates Available: 1.9 - 34.1 LPM
(0.5 - 9.0 GPM)

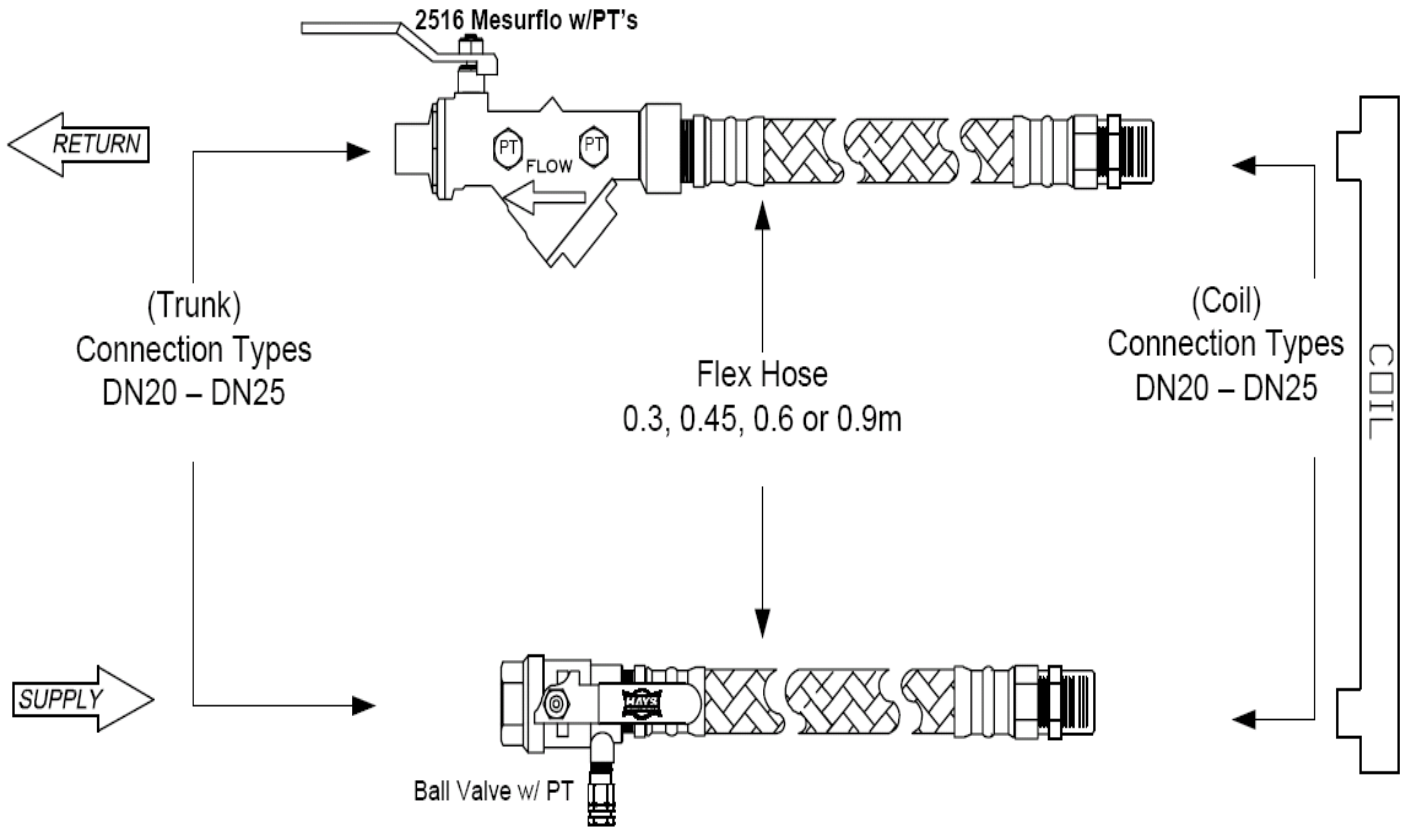

Optional Y-ball Strainer with PT (Port 4) with Blowdown Valve & Hose Connector. Replaces Ball Valve w/PT

