



**Mesurflo® Y-Ball Automatic  
Balancing Hose Kits 2516  
Order Form**


- 1) A separate sheet is required for each configuration change
- 2) Make a check mark  by each option and list quantities by each Flow Rate
- 3) Make as many copies as needed for each order

<b>Hose Kit Type</b>	
Y-Ball Mesurflo®	
<b>Hose Kit Connection Size</b>	
DN15 (1/2)	
<b>Hose Length (Other Lengths Available. Contact Factory)</b>	
0.3M (12")	
0.45M (18")	
0.6M (24")	
0.9M (36")	
<b>Strainer Options* (Supply Side)</b>	
No Strainer	
Y-Ball Combination Strainer & Ball Valve with Pressure/Temperature Port, Blowdown Valve with Hose Connector	
<b>Ball Valve* (Supply Side)</b>	
Ball Valve with Pressure/Temperature Port (If no strainer ordered)	
<b>Ball Valve (Return Side)</b>	
Y-Ball Combination Mesurflo® & Ball Valve with Pressure/Temperature Ports	


<b>LPM (GPM)</b>	<b>Qty</b>
21.0 (5.50)	
23.0 (6.00)	
25.0 (6.50)	
27.0 (7.00)	
28.4 (7.50)	
30.3 (8.00)	
34.1 (9.00)	



**Mesurflo® 2516**  
**Automatic Balance Hose Kit**  
**Flow Rates Available: 21 - 34.1 LPM**  
**(5.5 - 9.0 GPM)**

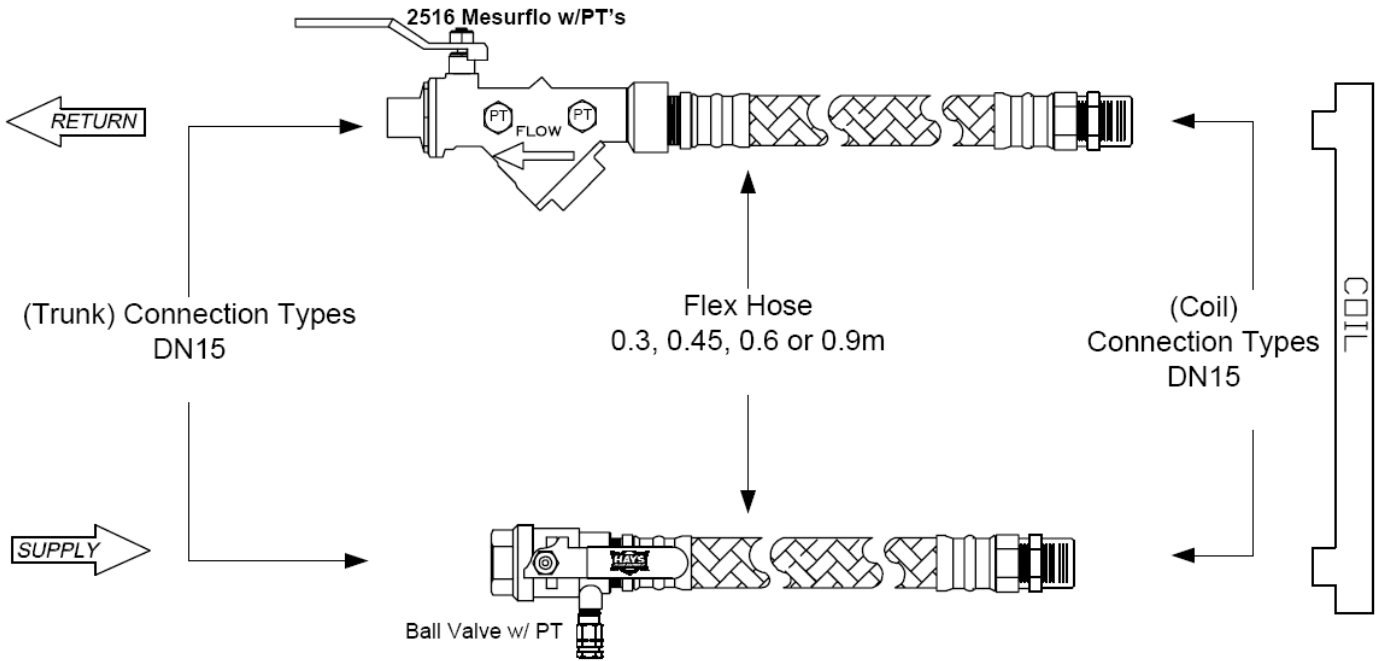

Optional Y-Ball Strainer w/PT (port #4) & BDVHC replaces Ball Valve w/PT



DWG. NUMBER \_\_\_\_\_

DWG. APPROVAL \_\_\_\_\_

DWG. SUBMITTAL DATE \_\_\_\_\_

DWG. SUBMITTED BY \_\_\_\_\_

QUOTE # \_\_\_\_\_

ALL HAYS PIPING PACKAGES ARE ASSEMBLED AND LEAK TESTED

- DRAWING NOT TO SCALE
- IMPORTANT: HAYS FLUID CONTROLS CANNOT GUARANTEE THAT ALL PIPING PACKAGES FIT WITHIN THE CONFINES OF A SPECIFIC INSTALLATION AREA.
- FOR NONLIKE SIZE COMPONENTS, TRANSITION FITTINGS MAY BE REQUIRED THAT ARE NOT SHOWN ON THE DRAWING.