




Name: Mesurflo

Sizes: 1/2", 3/4" and 1"

GPM: 0.50 - 9.00

**Type: Automatic
Balancing Valve**

Model: 2510

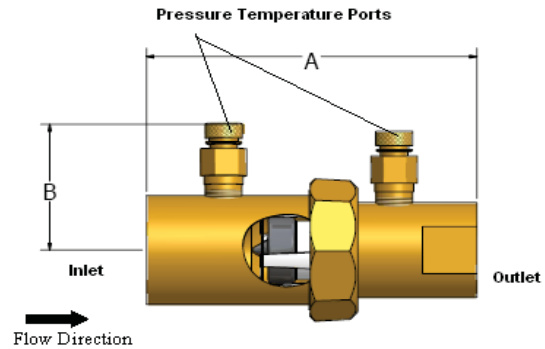

Standard Features:

- FNPT and MNPT Inlet / Outlet Connections
- Changeable GPM Flow Cartridges
- Differential Operating Pressure:
2-80 PSID 0.50-5.00 GPM
3-80 PSID 5.50-9.00 GPM
- ± 10% Accuracy
- Operating Temperature Range 32°F to 225° F
- 1/4" Pressure / Temperature Ports
- Dryseal Pipe Threads
- Valve Body Suitable for 600 PSIG
- Valves Labeled with Model No., Size & Flow Rate

Options:

- Pressure Taps
- Extended Pressure / Temperature Ports
- Stainless Steel Tag-Chain Upon Request

MATERIAL SPECIFICATIONS	
Valve Body	Brass
Union Nut	Brass
Tailpiece	Brass
Pressure / Temperature Ports	Brass
O-Rings	EPDM
Diaphragm	EPDM
Retainer Ring	Stainless Steel
Orifice	Polyphenylsulfone

Dimensions			
A		B	
IN	MM	IN	MM
3.07	78	2	51