



**Sizes: 1/2", 3/4", 1", 1-1/4", 1-1/2" & 2"**


**Type: Y-Ball Combination Strainer with Union**

**Specifications:**

- Nominal Working Pressure: 400 PSI
- Working Temperature: 32°F - 225°F
- Blowdown Valve w/ Hose Connector
- 1 Pressure/Temperature Port
- Lever Handle
- Inlet Connections FSWT, FNPT
- Outlet Connections FSWT, FNPT or MNPT
- Strainer Screen Stainless Steel / 20 Mesh

**Options:**

- Short Handles (1/2"-1" only)
- Extended Handles & Pressure Temperature Port<sup>1</sup>
- Manual Air Vent Port
- If Right or Left Hand Porting is Needed on the Strainer, Consult Factory for Assistance

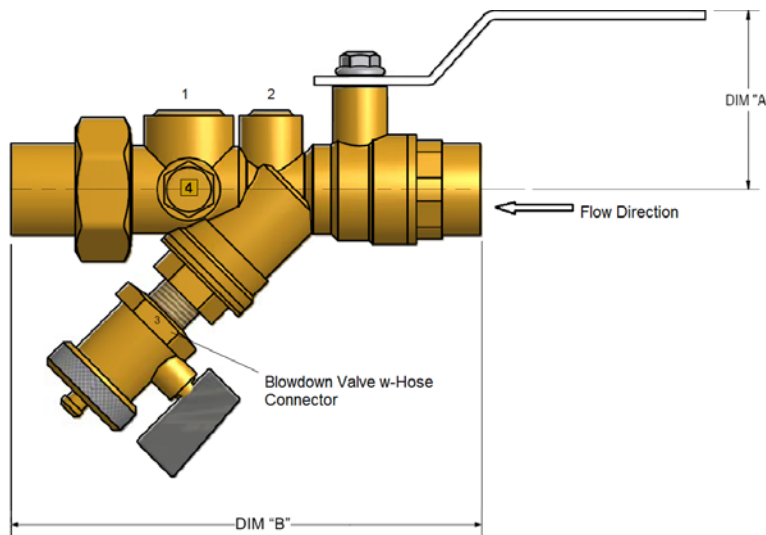

Dimensions*		
Size (In)	"A"	"B"
1/2 (YS)	5.5	5.0
3/4 (YS)	5.5	5.4
3/4 (YM)	6.0	5.8
1 (YM)	6.0	6.2
1-1/4 (YL)	8.0	7.6
1-1/2 (YL)	8.0	7.7
2 (YX)	9.0	12

Material Specifications	
Seats	PTFE
Ball	Chrome Plated Brass
Stem	Brass
Handle	Steel
Valve Body	Brass
Screw	Steel
O-Rings	EPDM
Hex Socket Pipe Plug	Brass
Union Nut	Brass
Tailpiece	Brass
Fixed End	Brass
Pressure/ Temperature Ports	Brass
Strainer	Stainless Steel

<sup>1</sup> Extended Handles cannot be ordered without extended Pressure/Temperature Ports

\* Dimensions listed are approximate. Various connections types can change the lay lengths. Consult factory for more detail.